



## Specification Sheet

**Date:** \_\_\_\_\_ **Customer** \_\_\_\_\_  
F.I.A. Approved  SFI Approved

Number of Harnesses Required  Measurements in:  mm  Inches  
Colour: Blue  Red  Black

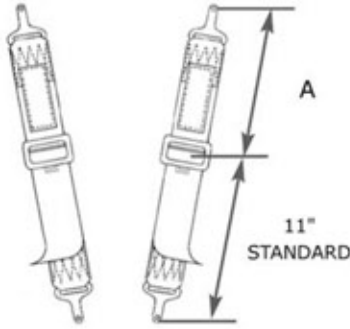


Single Seater Type

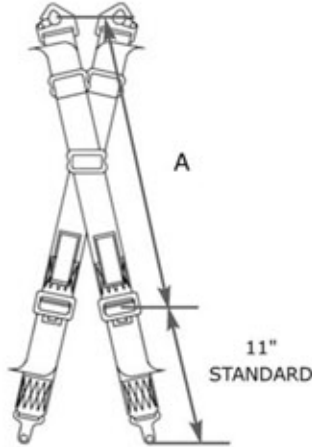

Saloon Type



Rotary (Aircraft) Buckle




Lever Latch & Link

### Shoulder Straps – Measurements Should Be Taken With Driver Seated In Vehicle

Webbing Width: 75 mm (3")  50 mm (2")  75 mm (3") / 50 mm (2") HANS® use only

Length:  (Measure Distance "A" From Centre of Anchor Mounting Tongue to Centre of Adjuster)


### Lap Straps – Measurements Should Be Taken With Driver Seated In Vehicle



Webbing Width 75mm (3")  50mm (2")


Length:  (Measure Distance "B" From Anchor Point to Anchor Point With Driver Seated in Vehicle)

### Direction of Lap Strap Adjustment

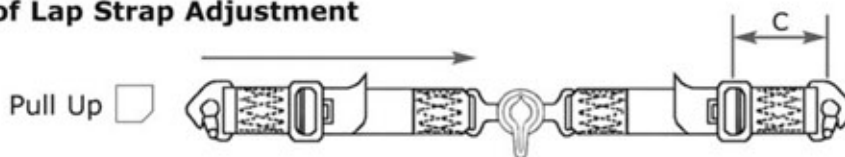




Pull Up

Pull Down

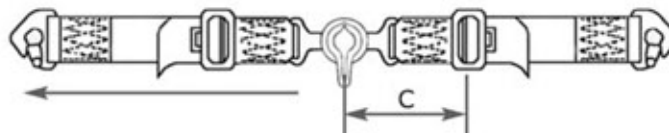

Length C:  Standard Length of Dimension 'C' Pull Up or Pull Down is 6" (150mm) Centres

**Crotch Strap – Measurements Should Be Taken With Driver Seated In Vehicle**



Length C:  (Measure Distance "C")

**Rotary Buckle Permanently Fixed To:**

Right Hand Lap Strap



Left Hand Lap Strap

Crotch Strap

**Anchorage** Please note: All mounting types can be supplied stitched or threaded

Threaded Wrap Around




If Using This Type Of Mounting Provision Must Be Made To Prevent Lateral Movement

Stitched Loop



Please State Loop Diameter In Inches:

Snap Hook



Bolt Fixing Type A



Please State Hole Diameter: 6 mm (1/4"), 8 mm (5/16") or 9 mm (3/8"):

Bolt Fixing Type B



Please State Hole Diameter: 9 mm (3/8") or 11 mm (7/16"):

Pinch Plates



Please State Hole Diameter: 8 mm (5/16") or 9 mm (3/8"):

Swivel Fixing Type C



Hole Diameter: 15 mm (5/8") (For 7/16" UNF bolt with top hat spacer)

Shoulder Straps

Lap Straps

Crotch Straps

**Adjuster Types & Extras**

3 Bar Locker



Standard Willans 50 mm (2") Adjuster



75mm (3") Willans Steel Adjuster



Aluminium Alloy 50mm (2") Adjuster



75mm (3") Willans Aluminium Alloy Adjuster



Nylon 'T' Handles



Velcro Shoulder Straps



Shoulder Straps

Lap Straps

Crotch Straps